



# HIT<sup>®</sup>

## DOOR CLOSER - 1800 Series

- Surface mounted door closer
- Tough performance for metal door
- ISO 9002 certified company from Taiwan
- Right and left hand orientation
- Flexible type of installation - standard, parallel arm [with optional bracket] and top jamb application
- Two [2] adjustable screws for controlling the closing speed of the door
- Has rigid body structure and precise mechanical parts for longer durability and smooth operation
- Special feature - hold open arm set


### HOLD OPEN ARM SET

#### ADVANTAGES OF HOLD-OPEN ARM SET

1. The hold open arm set has the capability of controlling the actual location to where the door would move.
2. Lesser mechanical problem since the hold open feature is located outside the body of the door closer.
3. Stronger and more rigid.




#### SPEED ADJUSTMENT

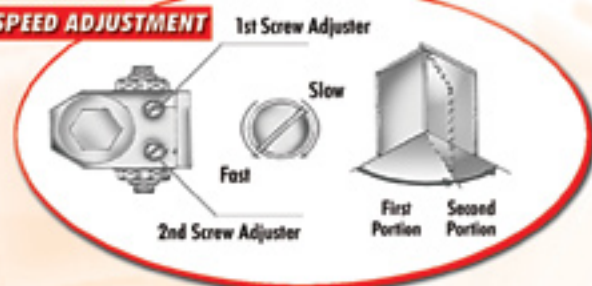


No.	Model	Max Width of the Panel	Approximate Weight
1	1803	1,050 mm	40 kg - 65 kg
2	1804	1,200 mm	60 kg - 85 kg
3	1805	1,350 mm	80 kg - 120 kg


### TYPE OF INSTALLATION

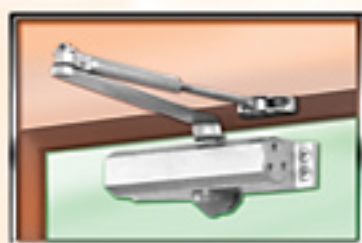

Standard

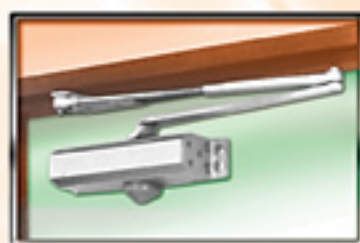

Parallel Arm

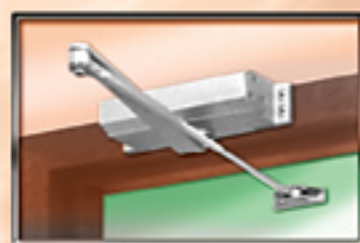

Top Jamb



**STAINLESS FLAG HINGE**  
[ 5" x 4" ]



**STAINLESS BUTTERFLY BALL BEARING HINGE**  
4"X4" (loose pin type)



**S.F.C. MORTISE TYPE FLUSH BOLT**

Accessories

- DURABLE
- ECONOMICAL
- EASY TO INSTALL