


MAXSTEEL®

www.maxsteel.com.ph

UL620 FIRE RATED EXIT DEVICE

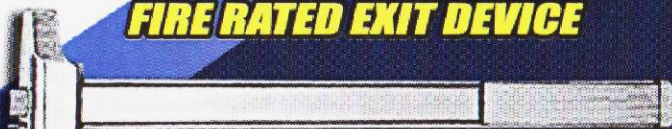

- For single panel / leaf door w/ maximum 1200mmw
- Conforms to ANSI A156.3 Grade 1
- UL-listed 3 hours Fire Rating
- Brand: SuperBright


UL620V FIRE RATED EXIT DEVICE



- For double panel / leaf door w/ maximum 1200mmw
- Conforms to ANSI A156.3 Grade 1
- UL-listed 3 hours Fire Rating
- Brand: SuperBright



RL-500/RL-747SZ EXIT DEVICE

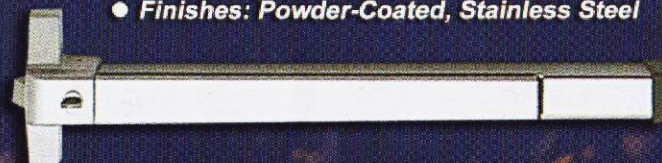

- For single panel / leaf door
- Maximum panel / width of 1200mm
- Finishes: Powder-Coated, Stainless Steel


F-ED 500/S550 SERIES FIRE RATED EXIT DEVICE

- For single panel / leaf door
- Maximum single panel / leaf width of 960mm
- UL-Listed, 90 minutes FIRE RATING
- Finishes: Powder-Coated, Stainless Steel



F-ED 531 SERIES FIRE RATED EXIT DEVICE

- For double panel / leaf door
- Maximum single panel / leaf width of 960mm
- UL-Listed, 90 minutes FIRE RATING

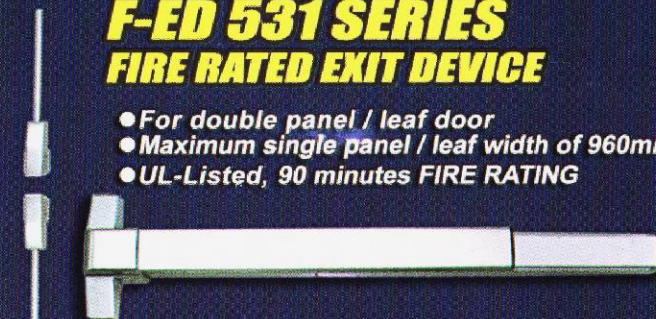

VR-560P EXIT DEVICE

- For double panel / leaf door
- Maximum single panel / leaf width of 1200mm



DSGI DIATECH SUCCESS GROUP, INC.

190 C3 Gen. Luis St., Novaliches, Q.C., Philippines ■ Tel. Nos.: 936-7518
936-5349 ■ 417-2194 ■ 419-7177 ■ 417-5886 ■ Fax: 936-5376 ■ 419-7007 ■
E-mail: diatech@pltdsl.net ■ sales@maxsteel.com.ph ■ Website: www.maxsteel.com.ph

XUMO[®]

LOCK SYSTEMS

TL SERIES



**NA30000
(NAVA)**

- Stainless Steel cylindrical knobset
- Entrance Lock




**TC-0S00
(TUCSON)**

- Tubular Lever Lockset
- Entrance lock
- Finish: Satin Nickel

STANLEY

Commercial Hardware[®]




**EA30000
(EATON)**

- ANSI/BHMA A156.2-2003 Grade 2
- Cylindrical knobset Entrance Lock
- S.S. latch bolt with 6-pin keyway cylinders
- UL-LISTED 3-hour Fire rating




EV90300 (EVAN)

- ANSI/BHMA A156.2-2003 Grade 2
- Cylindrical Lever Entrance Lock
- S.S. latch bolt with 6-pin keyway cylinders
- Non-handed lever with torsion spring
- UL-LISTED 3-hour Fire rating



**LI10010 /
LI10011**

- ANSI/BHMA A156.5-2001 Grade 2
- Single / Double Cylinder Deadbolt with full 1" latch throw
- UL-LISTED 3-hour Fire rating

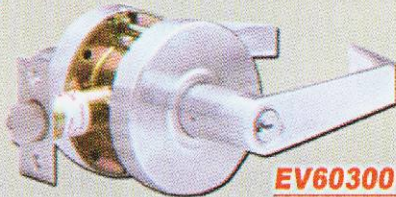

EV60300 (EVIE)

FL60300 (FLORIDA)


- ANSI/BHMA A156.2-2003 Grade 1
- Single / Double Cylinder Deadbolt with full 1" latch throw
- UL-LISTED 3-hour Fire rating



LM20310

- ANSI/BHMA A156.5-2001 Grade 1
- Single Cylinder Deadbolt with full 1" latch throw
- UL-LISTED 3-hour Fire rating


Doorcloser - 1800 Series



- Surface mounted door closer
- Flexible type of installation - standard, parallel arm [with optional bracket] and top jamb application
- Two [2] adjustable screws for controlling the closing speed of door
- Non-handle withheld open function

HIT[®]
DOORCLOSERS


Doorcloser - D02 Series



- Surface mounted door closer
- Commercial Grade 1 ANSI/BHMA A156.4-2000
- Complies with ANSI A117.1 ADA Requirements
- UL-Listed, 3 Hours Fire-rated
- With Backcheck and Delay Action
- Forged steel arm for standard, top jamb and parallel arm application
- Non-handed, no hold open function
- Finish: Aluminum alloy housing




Doorcloser - Lucky 083V/084V



- Surface-mounted door closer
- With standard arm
- UL-Listed, Fire-rated 90 minutes
- With anodized Aluminum body

MAXSTEEL[®]


STAINLESS FLAG HINGES



- Stainless Steel SUS304
- 5"x4" Loose-pin type
- 12mm Shaft pin
- 5-screw attachment / leaf

MAXSTEEL[®]

STAINLESS BUTTERFLY BALL BEARING HINGE



- Stainless Steel SUS304
- Knuckle, Full-mortise type
- Non-rising Loose pin
- 2-ball bearing 4"x4" x 3mm thk
- 4-ball bearing 4.5"x4" x 3.5mm thk

SFC STAINLESS FLUSH BOLT



- S.F.C.
- Stainless Steel SUS304

STAINLESS PULL/PUSH HANDLE



- Stainless Steel SUS304
- 19mm dia Stainless tube handle
- With 100 mmw x 300 mmh plate



MAXSTEEL DOUBLE ACTION FLOOR HINGE

- Hydraulic Floor Hinge R04-25Nm
- Stainless Steel SUS304
- for max 110kgs/leaf